











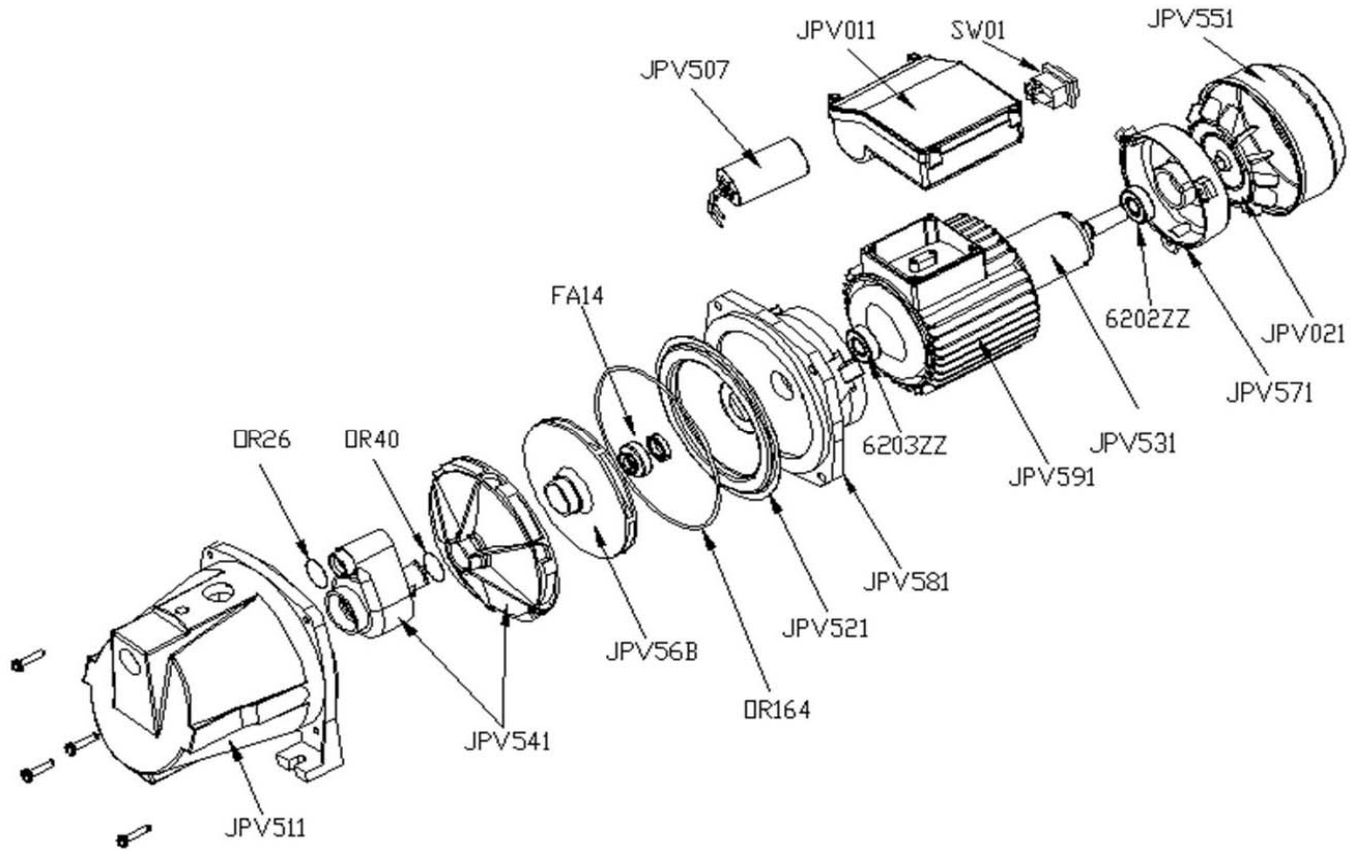








JPV 1500 B



No	Code	Name	Qty	No	Code	Name	Qty
1	039301	Pump case	1	33	029864	Combined stator	1
2		Screw	1	34		Plug	1
3		„O” ring 8*2	1	35		Base	1
4		Screw	1	36	010771	Bearing	1
5		„O” ring 12*2	1	37		Corrugated washer	1
6		Screw	2	38		Rear badge plate	1
15		Plastic cap	2	39		Screw	6
16		„O” ring 26*2	1	40	026023	Fan	1
17	029861	Diffuser	1	41		Fan enclosure	1
18		„O” ring 40*3,5	1	42	026025	Condenser housing	1
19	029862	Impeller	1	43		Screw	6
20		Screw nut	1	44		„O” ring 140*1,5	1
21		Washer	1	45	029868	Switch	1
22		Washer	1	46		Condenser	1
23		Key	1	47		Condenser fixing	1
24	26020	Axial gasket	1	48		Cable shoe	8
25		Back insert	1	49		Shrinkable tube	8
26	026021	„O” ring 164*3,5	1	50		Connection terminal	1
27		Diffuser	1	51		Screw nut	6
28	036501	Motor front badge plate	1	52		Washer	6
29		Screw	4	53		Screw	7
30		Washer	4	54		Washer	4
31	032679	Bearing	1	55		Washer	1
32	029865	Rotor	1	56		Washer	1

JPV 1500 B - parts that can be ordered

Serial no.	Description	Piece no.	Note	Picture
1	Pump case	1	Cast iron case, with 1" connections	
16	„O“ ring 26*2	1	Sealing ring in the suction part of the injector	
17	Diffuser	1	Plastic element in the pump case, with anti-spinning piece	
18	„O“ ring 40*3,5	1	Sealing ring between the injector and the anti-spinning piece	
19	Impeller	1	Ø 135 mm, 12-blade closed, plastic impeller. Blade height: 6.2 mm	
24	Axial gasket	1	Ceramic-insert gasket for the 14mm shaft	
25	Back insert	1	Pressed inox plate closing the hydraulic chamber	
26	„O“ ring 164*3,5	1	Sealing between the pump case and the back insert	
28	Motor front badge plate	1	Motor badge plate on the drive side	
31	Bearing	1	Ball bearing	
32	Rotor	1	239 mm shaft length, with Ø54.4 mm, 96mm long iron core	
33	Combined stator	1	1500 W coil, with Ø 110 mm, 96mm long iron core, in finned aluminium housing	
36	Bearing	1	Ball bearing	
38	Rear badge plate	1	Aluminium badge plate on the side opposite to the drive	
40	Fan	1	Plastic fan blade, on spliced shaft	
41	Fan enclosure	1	Cooling fan enclosure	
42	Condenser housing	1	Plastic cabinet containing electric fittings	
45	Switch	1	16A/250V red switching key	
46	Condenser	1	25uF/400V condenser	